

### Laboratory Refrigerator and Upright Freezer LabStar Sirius

- Static cooling with automatic defrost and condensate evaporation
- Cooling unit top
- Operating panel with main switch
  - Electronic control with digital display
  - Visual/audible alarm device
  - Alarm warning for excess and insufficient temperature
  - Door alarm
- No-volt remote alarm contact for connection to a remote alarm system
- RS 485 port
- Self-closing and lockable door
- Door hinges on right, changeable
- Door seal changeable
- 3 adjustable grid inserts in tilt-resistant guide rails
- Interior made of stainless steel CNS
- 4 castors, 2 lockable

**Static Cooling**



LabStar Sirius LSSI 7505EWN  
(With accessories Inventory Systems. See sep. brochure.)

Model LabStar Sirius	LSSI 7505	LSSI 7505	LSSI 7530	LSSI 7525
Version	EWN/EEEN	GEWN/GEEN Glass door	EWN/EEEN	GEWN/GEEN Glass door
Temperature range	°C: +1/+10	+1/+10	-10/-30	-10/-23
Content	litres (gross): 618	627	618	627
Content	litres (net): 451	458	416	423
Ext. dimensions (WxDxH)	mm: 720x860x1997	720x860x1997	720x860x1997	720x860x1997
Int. dimensions (WxDxH)	mm: 600x685x1505	600x695x1505	600x685x1505	600x695x1505
Depth with door opened	mm: 1540	1540	1540	1540
Grid inserts	: 3	3	3	3
Weight	kgs: 117	117	121	121
Mains connection	volts/Hz/ph: 230/50/1	230/50/1	230/50/1	230/50/1
Shipping dimensions (WxDxH)	mm: 800x900x2200	800x900x2200	800x900x2200	800x900x2200
Shipping weight	kgs: 129	129	133	133
Refrigerant CFC- and HCFC-free	: R134a	R134a	R404A	R404A

### LabStar Sirius + Accessories:

### Outside/ Inside

### Cat. No.

LabStar Sirius LSSI 7505EWN	white / CNS	GSLSSI7505EWN
LabStar Sirius LSSI 7505EEEN	CNS / CNS	GSLSSI7505EEEN
LabStar Sirius LSSI 7505GEWN	white, glass door / CNS	GSLSSI7505GEWN
LabStar Sirius LSSI 7505GEEN	CNS, glass door / CNS	GSLSSI7505GEEN
LabStar Sirius LSSI 7530EWN	white / CNS	GSLSSI7530EWN
LabStar Sirius LSSI 7530EEEN	CNS / CNS	GSLSSI7530EEEN
LabStar Sirius LSSI 7525GEWN	white, glass door / CNS	GSLSSI7525GEWN
LabStar Sirius LSSI 7525GEEN	CNS, glass door / CNS	GSLSSI7525GEEN

ProfiTec Temperature Monitoring and Recording System (see sep. brochure).

GPTEC4A

ProfiCaller telephone dialler (see sep. brochure).

on request

Pt-100 temperature sensor, add. installed for ext. temperature recording.

ZXX2-020-2L

Ex-Version „Interior free of ignition sources.“

ZLSSI1-070

Grid inserts, 530x655 mm (WxD).

ZLSSI4-530x655

Guide rails for grid inserts (1 pair).

ZLSSI4-024

Drawer with telescopic slide-out for LSSI 75xx, made of CNS.

ZLSSI4-002

Interior socket, tropical design.

ZLSSI1-001-01

Feet instead of castors, made of CNS (50 mm height adjustable).

ZLSSI5-021-125

Duct to storage compartment 26 mm in diameter.

ZLSSI1-002-26

Door hinges factory-mounted on left.

ZLSSI5-001

MIN/MAX thermometer to be placed in refrigerators or freezers.

ZXX2-019-001

Measuring range -50/+50°C, an add. temperature sensor is not required.

ZXX2-019-011

MIN/MAX digital thermometer. Hand-held unit with digital display as well as data-hold and relative measuring function. Measuring range -200/+1370°C.

An add. temperature sensor is required, eg. Cat.-No. ZXX2-022-100.

ZXX2-022-100


Temperature sensor for MIN/MAX thermometer ZXX2-019-011.

ZXX2-022-100

Measuring range -100/+1000°C. Length 2 m. Other ranges on request.

### Inventory Systems

Stainless steel racks, freezer cassettes and grid inserts enable specimens to be stored and retrieved in a clear and orderly manner. Optimum use is made of the storage capacity.

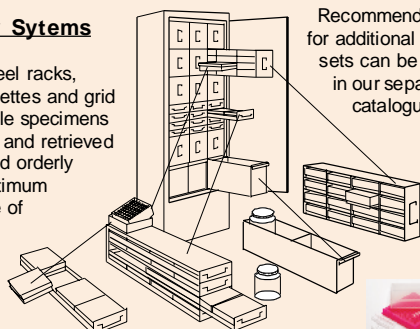


Recommendations for additional storage sets can be found in our separate catalogue.



Please ask for a personal fitting option.

Top view

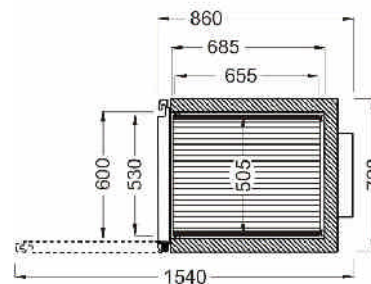

Side view

