

Laboratory Chest Freezer ProfiLine Pollux PLPO

- Static cooling and manual defrost
- Electronic control and digital display
 - Visual/audible alarm warning for excess and insufficient temperature
 - No-volt remote alarm contact for connection to a remote alarm system
- External housing made of white, galvanized steel plate
- Interior made of aluminium
- Condensate drain integrated in base
- Lockable lid and spring-loaded hinges to allow opening at any angle
- Interior lighting (except for ex-version)



ProfiLine Pollux 3645WN

Model ProfiLine Pollux	PLPO1345WN	PLPO2245WN	PLPO3045WN	PLPO3645WN	PLPO4245WN
Temperature range	°C: -5/-45	-5/-45	-5/-45	-5/-45	-5/-45
Content litres (gross):	130	226	299	358	416
Ext.dimensions (WxDxH)	mm: 725x731x865	1055x731x865	1305x731x865	1505x731x865	1705x731x865
Int.dimensions 1 (WxDxH)	mm:	< see sketch >			
Int.dimensions 2 (WxDxH)	mm:	< see sketch >			
Height at open top	mm: 1555	1555	1555	1555	1555
Weight	kgs: 43	54	64	67	77
Mains connection	:	< 1/N/PE ~ 230 V 50 Hz >			
Insulation CFC-free	mm: 100	100	100	100	100
Shipping dimensions (WxDxH)	mm: 825x831x1065	1155x831x1065	1405x831x1065	1605x831x1065	1805x831x1065
Shipping weight	kgs: 48	59	69	72	82
Refrigerant CFC- and HCFC-free	: R404A	R404A	R404A	R404A	R404A


Alternative units: ProfiLine Taurus and LabStar Mira.

ProfiLine Pollux + Accessories:


	Cat. No.
ProfiLine Pollux PLPO 1345WN	GTPLPO1345WN
ProfiLine Pollux PLPO 2245WN	GTPLPO2245WN
ProfiLine Pollux PLPO 3045WN	GTPLPO3045WN
ProfiLine Pollux PLPO 3645WN	GTPLPO3645WN
ProfiLine Pollux PLPO 4245WN	GTPLPO4245WN
ProfiTec Temperature Monitoring and Recording System (see sep. brochure).	GPTEC4A
ProfiCaller telephone dialler (see sep. brochure).	on request
Pt-100 temperature sensor, add. installed for ext. temperature recording.	ZXX2-020-2L
Ex-Version „Interior free of ignition sources.“	on request
4 castors (2 lockable), factory assembled.	ZPLPO5-022-4245
Storage basket, 285x445x250 mm (WxDxH).	ZXX4-087
MIN/MAX thermometer to be placed in refrigerators or freezers.	ZXX2-019-001
Measuring range -50/+50 °C, an add. temperature sensor is not required.	
MIN/MAX digital thermometer. Hand-held unit with digital display as well as data-hold and relative measuring function. Measuring range -200/+1370 °C.	ZXX2-019-011
An add. temperature sensor is required, eg. Cat.-No. ZXX2-022-100.	
Temperature sensor for MIN/MAX thermometer ZXX2-019-011.	ZXX2-022-100
Measuring range -100/+1000 °C. Length 2 m. Other ranges on request.	

Inventory Sytems

Stainless steel vertical racks, freezer cassettes and grid inserts enable specimens to be stored and retrieved in a clear and orderly manner. Optimum use is made of the storage capacity. Storage systems are also available for this model in our separate brochures. You can also contact us for a personal consultation.



Side view

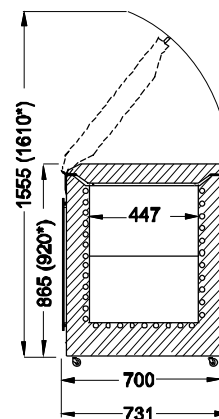

* Incl. castors

Front view

