

Laboratory Refrigerator and Upright Freezer LabStar Sirius

- Forced air circulation with automatic defrost and condensate evaporation
- Cooling unit top
- Operating panel with main switch
 - Electronic control with digital display
 - Visual/audible alarm device
 - Alarm warning for excess and insufficient temperature
 - Door alarm
 - No-volt remote alarm contact for connection to a remote alarm system
- RS 485 port
- Self-closing and lockable doors
- Door seal changeable
- 6 adjustable grid inserts in tilt-resistant guide rails
- Interior made of stainless steel CNS
- 5 castors, 3 lockable



LabStar Sirius LSSI 14005EUW
(With accessories Inventory Systems. See sep. brochure.)

Model LabStar Sirius	LSSI 14005	LSSI 14005	LSSI 14030	LSSI 14025
Version	EWU/EEU	GEWU/GEEU Glass door	EWU/EEU	GEWU/GEEU Glass door
Temperature range	°C: +1/+10	+1/+10	-10/-30	-10/-23
Content litres (gross)	1360	1380	1360	1380
Content litres (net)	870	883	870	883
Ext. dimensions (WxDxH) mm	1440x860x1997	1440x860x1997	1440x860x1997	1440x860x1997
Int. dimensions (WxDxH) mm	1320x685x1505	1320x695x1505	1320x685x1505	1320x695x1505
Depth with door opened mm	1540	1540	1540	1540
Grid inserts	:6	6	6	6
Weight kgs	178	178	188	188
Mains connection volts/Hz/ph	230/50-60/1	230/50-60/1	230/50-60/1	230/50-60/1
Shipping dimen. (WxDxH) mm	1520x900x2200	1520x900x2200	1520x900x2200	1520x900x2200
Shipping weight kgs	195	195	205	205
Refrigerant CFC- / HCFC-free	R134a	R134a	R404A	R404A

LabStar Sirius + Accessories:

Outside / Inside

Cat. No.

LabStar Sirius LSSI 14005EUW	white / CNS	GSLSSI14005EUW
LabStar Sirius LSSI 14005EEU	CNS / CNS	GSLSSI14005EEU
LabStar Sirius LSSI 14005GEWU	white, glass door / CNS	GSLSSI14005GEWU
LabStar Sirius LSSI 14005GEEU	CNS, glass door / CNS	GSLSSI14005GEEU
LabStar Sirius LSSI 14030EUW	white / CNS	GSLSSI14030EUW
LabStar Sirius LSSI 14030EEU	CNS / CNS	GSLSSI14030EEU
LabStar Sirius LSSI 14025GEWU	white, glass door / CNS	GSLSSI14025GEWU
LabStar Sirius LSSI 14025GEEU	CNS, glass door / CNS	GSLSSI14025GEEU

ProfiTec Temperature Monitoring and Recording System (see sep. brochure).

GPTEC4A

ProfiCaller telephone dialler (see sep. brochure).

on request

Pt-100 temperature sensor, add. installed for ext. temperature recording.

ZXX2-020-2L

Grid inserts, 530x655 mm (WxD).

ZLSSI4-530x655

Guide rails for grid inserts (1 pair).

ZLSSI4-024

Drawer with telescopic slide-out for LSSI 140xx, made of CNS.

ZLSSI4-002

Interior socket, tropical design.

ZLSSI1-001-01

Feet instead of castors, made of CNS (50 mm height adjustable).

ZLSSI5-021-125

Duct to storage compartment 26 mm in diameter.

ZLSSI1-002-26

MIN/MAX thermometer to be placed in refrigerators or freezers.

ZXX2-019-001

Measuring range -50/+50°C, an add. temperature sensor is not required.

ZXX2-019-011

MIN/MAX digital thermometer. Hand-held unit with digital display as well as data-hold and relative measuring function. Measuring range -200/+1370°C.

An add. temperature sensor is required, eg. Cat.-No. ZXX2-022-100.

ZXX2-022-100

Temperature sensor for MIN/MAX thermometer ZXX2-019-011.

ZXX2-022-100

Measuring range -100/+1000°C. Length 2 m. Other ranges on request.

Inventory Systems


Stainless steel racks, freezer cassettes and grid inserts enable specimens to be stored and retrieved in a clear and orderly manner. Optimum use is made of the storage capacity.



Recommendations for additional storage sets can be found in our separate catalogue.



Please ask for a personal fitting option.

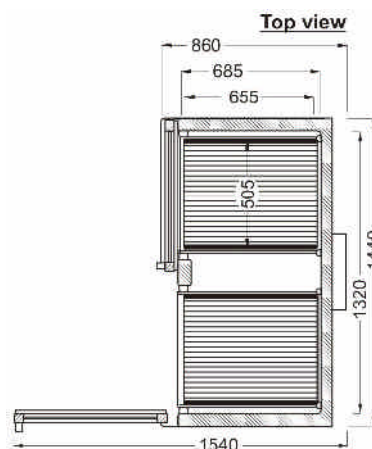

side view

